


MJ8-CAT5E



- Cat.5,5E Surge Protector
- Hybrid GDT and Diode Technology
- Bi-Directional Protection
- Shielded Connector Configurations
- DIN Rail, Screw Lug, and Flange Mounting
- UL497B Listed

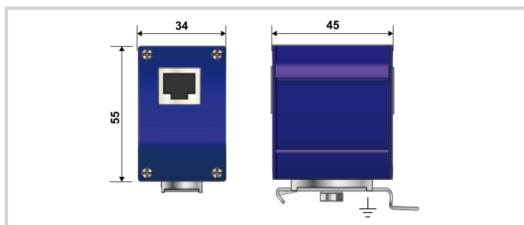

Características eléctricas		
Perdida de inserción		< 1 dB
Corriente de choque <i>Prueba 10/350µs x 2 - categoría D1</i>	limp	500 A
Capacity	pF	<25
NOMINAL DC LINE VOLTAGE	Vdc	5
MAX. DC LINE VOLTAGE	Vdc	8
WIRES		8W+Shield+Ground
LINE CURRENT MAX	(A)	1
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
PROTECTION LEVEL	(V)	20
IMAX	(kA)	16
MAX. DATA RATE	Gbps	1
MAX. FREQUENCY	Mhz	100
Características mecánicas		
Peso		0.114 kg
TECNOLOGIA		SAD-GDT
CONFIGURACION DE RED		Single C6A Line
CONNECTOR TYPE		Shielded RJ45
PIN OUT		[1-2][3-6][4-5][7-8]
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DIMENSIONS		See diagram
Normas		
Certificación		UL 497B
UL STANDARD		UL497B
UL CATEGORY		QVGQ
UL FILE NUMBER		E184939
NORMAS		IEC 61643-21, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Código		
560201		